



康乐达
KANGLEDA

浙江康乐达新能源有限公司
ZHEJIANG KANGLEDA NEW ENERGY CO., LTD

科技领先、不断创新、注重质量、客户满意



专注 电磁阀 41周年

专注
电磁阀 41 周年



公司使命 COMPANY MISSION

让水流更智能，让生活更美好
Make water flow more intelligent, make life better

公司愿景 COMPANY VISION

做最专业的电磁阀制造商
To be most professional manufacturer of solenoid valve

公司价值观 COMPANY VALUES

双赢、感恩、创新、专业
Win-win、Grateful、Innovative、Professional

战略目标 STRATEGIC TARGET

用户至上、质量第一、创世界名牌，利天下市场
Customer first, Quality first, Creating world famous brand,
Benefiting the world market

康乐达人精神 KLD SPIRIT

创新、务实、团结、奉献
Innovation, Pragmatism, Unity, Dedication

经营理念 BUSINESS PHILOSOPHY

科技领先、不断创新，注重质量、客户满意
Technology leading, Constant Innovation,
Quality-oriented, Customer satisfaction

康乐达人宗旨 KLD AIM

彻底认清产业者的使命，谋求社会的改善及进步，进而贡献于民族和世界
Thoroughly achieve the industrial mission, Strive for the social
improvement and progress, Contribute to the world widely

ABOUT

公司简介

1983

成立

Founded

6

条电磁阀生产线

Six production lines
for solenoid valve

6

条检测流水线

Six testing assembly
lines for solenoid valve

200

余产品种类

Product category

浙江康乐达新能源有限公司
ZHEJIANG KANGLEDA NEW ENERGY CO.,LTD.



浙江康乐达新能源有限公司位于享有“中国电器之都”美誉的浙江乐清，公司创建于1983年，是国内最早开发、生产进水电磁阀、脉冲电磁阀的厂家之一，也是最早参与制定国家家用洗涤设备专用电磁阀技术标准的企业之一。经过数十年奋发图强，康乐达已发展拥有6条电磁阀生产线、6条检测流水线、1个电磁阀工作研究室，具有独立研发、生产、过程管控、检测等全面品控能力，目前已发展成为全国同行中有着较大影响力的电磁阀专业制造商。

公司主要产品有进水电磁阀、脉冲电磁阀及电磁控制阀三大系列，生产的电磁阀200余种，广泛应用于国防、船舶、农牧、园林、洗涤家电、太阳能热水器、水处理、智能卫浴等生产领域及设备上，产品远销中国、东南亚及欧美等国内外20多个国家和地区，与Panasonic、Dyson、Culligan、九牧、箭牌、安吉尔等众多知名品牌建立了长期合作关系，企业知名度和美誉度不断提升。

专注
电磁阀 41 周年



Zhejiang Kangleda New Energy Co., Ltd is located in Yueqing, which enjoys a good reputation of "China Electric City" in Zhejiang. Kangleda, founded in 1983, is one of the earliest enterprises which develops and manufactures water inlet solenoid valve and pulse valve in China, and also is the enterprise which first participated in the development of national technical standards for specialized solenoid valve of household washing equipment. After decades of hard work, We have possessed six production and testing assembly lines of solenoid valve, as well as one solenoid valve research office. We are with the capability to independently develop, produce, control in process and test comprehensively. Now we have developed to be a professional manufacturer of solenoid valve, and also make our company popularity and reputation rising constantly.

Kangleda main products include water inlet solenoid valve, pulse valve and solenoid electric valve. We have more than 200 kinds of solenoid valves are widely used in the production fields and equipment such as national defense, vessel manufacturing, agriculture and animal husbandry, gardening, washing appliances, solar water heater, water treatment and smart toilet etc. Our products are exported to Southeast Asia, Europe, America and other more than 20 countries and have established long-term cooperation with Panasonic, Dyson, Culligan, Angel, JOMOO, ARROW and other well-known brands, and also make our company popularity and reputation rising constantly.



企业资质证书 CERTIFICATES OF QUALIFICATION



专注
电磁阀 41 周年





1983

浙江康乐达新能源有限公司（前身）成立。
Zhejiang Kangleda New Energy Co., Ltd.
(predecessor) established.

2000

康乐达率先制定了电磁阀行业技术标准，获得质量监督局备案(备案号: Q336382-K65.183)，并通过浙江省疾病预防控制中心卫生安全鉴定；
Get the certificate of CQC ISO:9001:2000 Connector for automotive audio & navigation system put into production

2001

通过ISO9001:2000国际质量管理体系认证；
Passed ISO9001:2000 international quality management system

2003

获得了CCLC的安全认证证书；
Obtained the National CCLC safety certificate

2005

获得了欧盟CE认证证书，同年被外经贸局审定为自营出口单位；
Obtained the European CE certificate and import and export license



2006

通过有害物质检验，并获得了ROSH认证证书；
Passed hazardous substance testing and obtained RoHS certificate

2007

被国家知识产权局授予电磁阀发明专利证书；
Obtained the certificate of solenoid valve patent of invention issued by the State intellectual Property Office

专注
电磁阀 41 周年



2012

获得了国家CQC安全认证证书;

Obtained the national CQC safety certificate

2013

通过了Reach有毒物质检验;

Passed the Reach toxic substances test

2016-2020

连续多年获得多项发明专利证书及数十项实用新型专利证书;

Obtained some patent of invention certificates again and dozens of National Utility Model Patent certificates from 2016 to 2020;

2021

获得国家高新技术企业证书;

Obtained the national high-tech enterprise certificate in 2021;

2014

通过英国WRAS和法国ACS检测，
同年获得了认证证书;

Obtained the British WRAS and
French ACS certificate;

2015

被美国灌溉协会授予灌溉节水证书;

Obtained the irrigation water-saving certificate issued by the American Irrigation Association;

2022

通过ISO14001:2015环境管理体系认证;

Passed ISO14001:2015 Environmental management system certification;

公司按ISO9001 : 2015和ISO14001:2015标准严格建立质量管理和环境管理体系，使“喜泉”品牌始终建立在客户第一质量第一的基础上。

We according to ISO9001:2015 and ISO14001:2015 standards strictly establish the quality management and environmental management system to make KLD brand always built on the basis of customer first and quality first.



康乐达
KANG LE DA

Panasonic

松下电器

Culligan

康丽根

九牧
JOMOO

至诚至信
SINCERE TO THE LETTER

SANDEN
Delivering Excellence

TOTO

智能卫浴专家

xylem

Let's Solve Water

ANNWA
安华卫浴

BESTTER
倍杰特股份

碧桂园
给您一个五星级的家

碧丽

碧水源
OriginWater

BJB®
便洁宝

东阳光

FAENZA
法恩莎卫浴

Haier 海尔

专注
电磁阀 41 周年



合作伙伴

COOPERATIVE PARTNER

WIN-WIN COOPERATION
合作双赢

dyson
戴森

ARROW
箭牌卫浴

Angel 安吉尔

Midea®
美的

SANYO
三洋

Hegll®
恒洁卫浴
中国卫浴 恒洁品质

皇明® Solar All
太阳能

JTAccord
—吉田·雅格—

VIVI® 维卫

Coburg®

Moershuh® 摩尔舒

R&T®
瑞尔特卫浴

Hilk®·喜尔康
Take care of your health

Coma 西馬

Weal Well 櫻井

工厂车间 ENTERPRISES WORKSHOP



自动化车间



自动机特写




注塑一体机



注塑车间



绕线一角

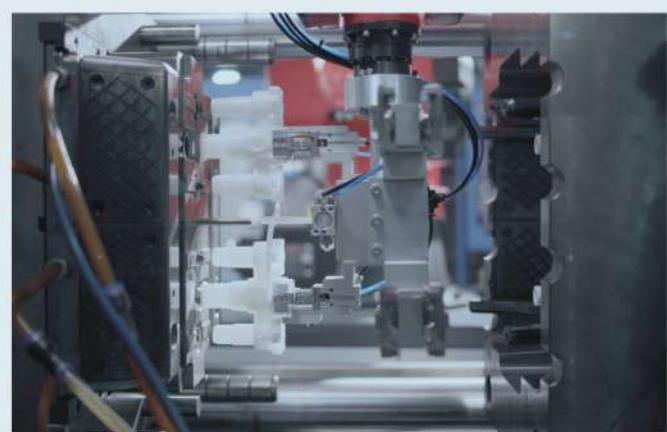

注塑特写

实验室设备 LABORATORY EQUIPMENT

专注
电磁阀 41 周年



实验室一角



气测试验



高低温交变湿热试验箱



灼热丝试验仪



3D投影仪



紫外光耐气候试验箱



盐雾腐蚀试验箱




X荧光光谱仪



目录 CONTENTS

智能卫浴电磁阀系列 Smart Sanitary Solenoid Valve Series

01-12

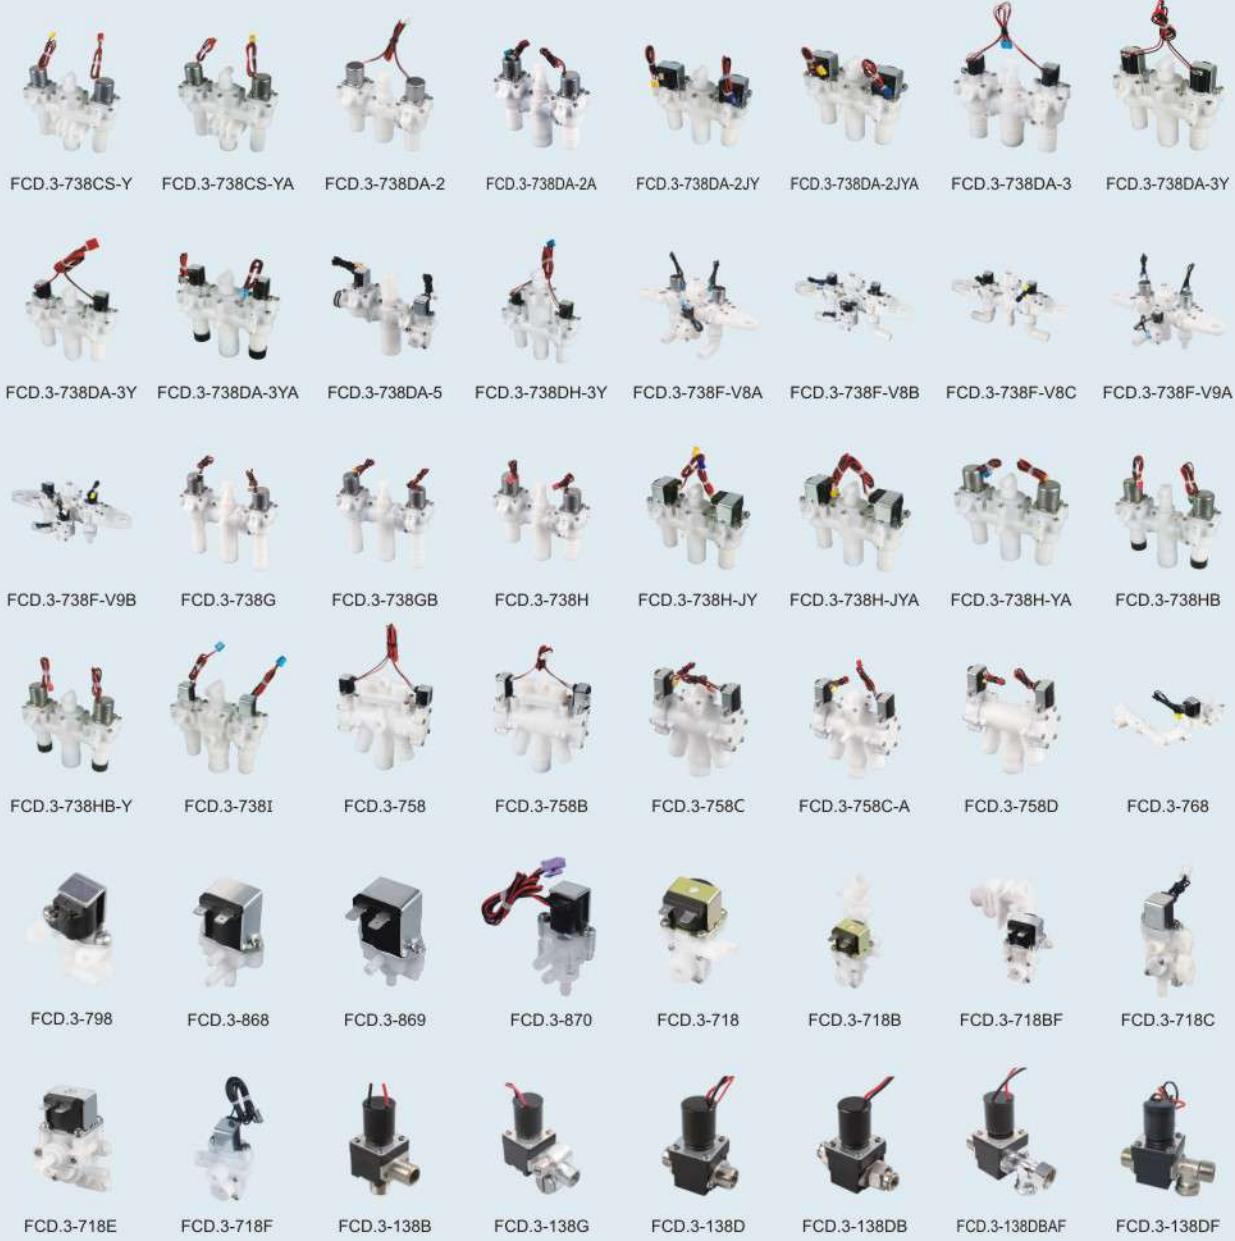

洗涤电磁阀系列 Washing Solenoid Valve Series

13-14



净水器电磁阀系列 R.O.Solenoid Valve Series

15-20



铜电磁阀系列 Copper Solenoid Valve Series

21-24



直角电磁阀系列 Angle Solenoid Valve Series

25-26



常开电磁阀系列 Normal Open Solenoid Valve Series

27-28





目录 CONTENTS

直通电磁阀系列 Straight Solenoid Valve Series

29-33



灌溉电磁阀系列 Irrigation Solenoid Valve Series

34-35



最新电磁阀系列 New Solenoid Valve Series

36-39



安装与使用说明 Install And Direction For Use

40-41

智能卫浴电磁阀系列

SMART SANITARY SOLENOID VALVE SERIES



FCD.3-738CS-Y

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	95mm			
水压(Water Pressure)				
	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)				
	≥15L/min	≥25L/min	≥35L/min	≥55L/min



FCD.3-738CS-YA

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	95mm	减压出水口: Decompression outlet	Ø6.3	
水压(Water Pressure)				
	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)				
	≥15L/min	≥25L/min	≥35L/min	≥55L/min



FCD.3-738DA-2

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	82mm			
水压(Water Pressure)				
	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)				
	≥15L/min	≥25L/min	≥35L/min	≥55L/min



FCD.3-738DA-2A

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	82mm	减压出水口: Decompression outlet	Ø6.3	
水压(Water Pressure)				
	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)				
	≥15L/min	≥25L/min	≥35L/min	≥55L/min



康乐达
KANGLEDA

智能卫浴电磁阀系列 SMART SANITARY SOLENOID VALVE SERIES



FCD.3-738DA-2JY

额定电压: 脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V
Rated voltage

水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread
安装间距: Install spacing	82mm		
水压(Water Pressure)			0.05Mpa 0.1Mpa 0.3Mpa 0.8Mpa
流量(Flow)			≥15L/min ≥25L/min ≥35L/min ≥55L/min



FCD.3-738DA-2JYA

额定电压: 脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V
Rated voltage

水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread
安装间距: Install spacing	82mm	减压出水口: Decompression outlet	
水压(Water Pressure)			0.05Mpa 0.1Mpa 0.3Mpa 0.8Mpa
流量(Flow)			≥15L/min ≥25L/min ≥35L/min ≥55L/min



FCD.3-738DA-3

额定电压: 脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V
Rated voltage

水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread
安装间距: Install spacing	82mm		
水压(Water Pressure)			0.05Mpa 0.1Mpa 0.3Mpa 0.8Mpa
流量(Flow)			≥15L/min ≥25L/min ≥35L/min ≥55L/min



FCD.3-738DA-3Y

额定电压: 脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V
Rated voltage

水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread
安装间距: Install spacing	82mm		
水压(Water Pressure)			0.05Mpa 0.1Mpa 0.3Mpa 0.8Mpa
流量(Flow)			≥15L/min ≥25L/min ≥35L/min ≥55L/min



FCD.3-738DA-3Y

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	82mm													
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量 (Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-738DA-3YA

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	82mm	减压出水口: Decompression outlet	Ø6.3mm											
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量 (Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-738DA-5

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V																		
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread																
介质温度: Medium temperature	0~50°C	冲水阀出水口: Flush valve outlet	Ø20.4																
安装间距: Install spacing	66.4mm	减压阀出水口: Pressure reducing valve outlet	Ø6.3																
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量 (Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> <tr> <td>减压阀流量 (Pressure reducing valve flow)</td> <td colspan="4">550-800ML(可调) 550-800ML(Adjustable)</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min	减压阀流量 (Pressure reducing valve flow)	550-800ML(可调) 550-800ML(Adjustable)			
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa															
流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min															
减压阀流量 (Pressure reducing valve flow)	550-800ML(可调) 550-800ML(Adjustable)																		



FCD.3-738DH-3Y

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	82mm													
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量 (Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量 (Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



康乐达
KANGLEDA

智能卫浴电磁阀系列 SMART SANITARY SOLENOID VALVE SERIES



FCD.3-738F-V8A

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø20	
安装间距: Install spacing	88mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
减压阀流量 (Pressure reducing valve flow)	550-800ML(可调) 550-800ML(Adjustable)			



FCD.3-738F-V8B

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø20	
安装间距: Install spacing	88mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
减压阀流量 (Pressure reducing valve flow)	550-800ML(可调) 550-800ML(Adjustable)			



FCD.3-738F-V8C

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø20	
安装间距: Install spacing	88mm			
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min



FCD.3-738F-V9A

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø20 & Ø12	
安装间距: Install spacing	88mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
减压阀流量 (Pressure reducing valve flow)	550-800ML(可调) 550-800ML(Adjustable)			



FCD.3-738F-V9B

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø20 & Ø12	
安装间距: Install spacing	88mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min
减压阀流量 (Pressure reducing valve flow)	550-800ML(可调) 550-800ML(Adjustable)			



FCD.3-738G

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	100mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min



FCD.3-738GB

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	100mm			
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min



FCD.3-738H

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	91mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min

智能卫浴电磁阀系列 SMART SANITARY SOLENOID VALVE SERIES



FCD.3-738H-JY

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	91mm			
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min



FCD.3-738H-JYA

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	91mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min



FCD.3-738H-YA

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	91mm	减压出水口: Decompression outlet	Ø6.3mm	
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min



FCD.3-738HB

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread	
安装间距: Install spacing	91mm			
水压(Water Pressure) 流量(Flow)	0.05Mpa ≥15L/min	0.1Mpa ≥25L/min	0.3Mpa ≥35L/min	0.8Mpa ≥55L/min



FCD.3-738HB-Y

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	91mm													
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-738I

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	Ø20											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	82mm	减压出水口: Decompression outlet	Ø11.2mm											
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-758

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	60mm	减压出水口: Decompression outlet	Ø11.2mm											
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-758B

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	60mm													
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



康乐达
KANGLEDA

智能卫浴电磁阀系列 SMART SANITARY SOLENOID VALVE SERIES



FCD.3-758C

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	60mm													
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-758C-A

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	60mm	减压出水口: Decompression outlet	Ø6.3mm											
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-758D

额定电压: Rated voltage	脉冲4.5V/脉冲6V/DC9V/DC12V/DC24V													
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	3/4"外螺纹 G3/4" male thread											
介质温度: Medium temperature	0~50°C	出水口: outlet	1/2"外螺纹 G1/2" male thread											
安装间距: Install spacing	60mm													
<table border="1"> <thead> <tr> <th>水压(Water Pressure)</th> <th>0.05Mpa</th> <th>0.1Mpa</th> <th>0.3Mpa</th> <th>0.8Mpa</th> </tr> </thead> <tbody> <tr> <td>流量(Flow)</td> <td>≥15L/min</td> <td>≥25L/min</td> <td>≥35L/min</td> <td>≥55L/min</td> </tr> </tbody> </table>					水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa	流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min
水压(Water Pressure)	0.05Mpa	0.1Mpa	0.3Mpa	0.8Mpa										
流量(Flow)	≥15L/min	≥25L/min	≥35L/min	≥55L/min										



FCD.3-768

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V			
水压范围: Working pressure	0.02~0.8Mpa	进水口: Inlet	Ø11	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø6	
进水压力: Inlet water pressure	0.2~0.8Mpa	出水压力: Outlet water pressure	0.1±0.02Mpa	
流量范围: Flow range	550~800ML(可调) 550~800ML(Adjustable)			



FCD.3-798

额定电压: DC9V/DC12V/DC24V
Rated voltage

水压范围: 0.02~0.8Mpa 进水口: Ø6.5
Working pressure Inlet

介质温度: 0~50°C 出水口: Ø6.5
Medium temperature outlet

水压(Water Pressure)	0.005Mpa	0.01Mpa	0.002Mpa	0.1Mpa	0.2Mpa	0.3Mpa
流量(Flow)	≥100L/min	≥150L/min	≥200L/min	≥500L/min	≥720L/min	≥820L/min



FCD.3-868

额定电压: 脉冲6V/DC9V/DC12V/DC24V
Rated voltage

水压范围: 0~0.3Mpa 进水口: Ø7.1
Working pressure Inlet

介质温度: 0~50°C 出水口: Ø6.1
Medium temperature outlet

水压(Water Pressure)	0.05Mpa	0.2Mpa
流量(Flow)	≥1.5L/min	≥3L/min



FCD.3-869

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
AC12V/AC24V/AC36V/AC48V/AC110V/AC220V
Rated voltage

水压范围: 0~0.3Mpa 进水口: Ø6.3
Working pressure Inlet

介质温度: 0~50°C 出水口: Ø6.3
Medium temperature outlet

水压(Water Pressure)	0.05Mpa	0.2Mpa
流量(Flow)	≥1.5L/min	≥3L/min



FCD.3-870

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
AC12V/AC24V/AC36V/AC48V/AC110V/AC220V
Rated voltage

水压范围: 0~0.1Mpa 进水口: Ø6.4
Working pressure Inlet

介质温度: 0~50°C 出水口A/B: Ø6.4
Medium temperature Outlet A/B

水压(Water Pressure)	0.02Mpa	0.05Mpa	0.08Mpa	0.1Mpa
出水口A(Outlet A)	≥0.5L/min	≥0.8L/min	≥1.5L/min	≥1.8L/min
出水口B(Outlet B)	≥0.3L/min	≥0.8L/min	≥1.0L/min	≥1.5L/min

智能卫浴电磁阀系列 SMART SANITARY SOLENOID VALVE SERIES



FCD.3-718

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V		
水压范围: Working pressure	0.02~0.8Mpa	进水口: Inlet	Ø6.3
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø6.3
进水压力: Inlet water pressure	0.2~0.8Mpa	出水压力: Outlet water pressure	0.1±0.02Mpa
流量范围: Flow range	550-800ML(可调) 550-800ML(Adjustable)		



FCD.3-718B

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V		
水压范围: Working pressure	0.02~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø6.5
进水压力: Inlet water pressure	0.2~0.8Mpa	出水压力: Outlet water pressure	0.1±0.02Mpa
流量范围: Flow range	550-800ML(可调) 550-800ML(Adjustable)		



FCD.3-718BF

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V		
水压范围: Working pressure	0.02~0.8Mpa	进水口: Inlet	1/2"外螺纹 G1/2" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø6.5
进水压力: Inlet water pressure	0.2~0.8Mpa	出水压力: Outlet water pressure	0.1±0.02Mpa
流量范围: Flow range	550-800ML(可调) 550-800ML(Adjustable)		



FCD.3-718C

额定电压: Rated voltage	DC9V/DC12V/DC24V		
水压范围: Working pressure	0.05~0.8Mpa	进水口: Inlet	Ø13
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø6.3
安装间距: Install spacing	42.5mm	出水压力: Outlet water pressure	0.1±0.02Mpa
流量范围: Flow range	550-800ML(可调) 550-800ML(Adjustable)		



FCD.3-718E

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V	进水口: Inlet	Ø6.3
水压范围: Working pressure	0.05~0.8Mpa	出水口: outlet	Ø6.3
介质温度: Medium temperature	0~50°C	出水压力: Outlet water pressure	0.1±0.02Mpa
进水压力: Inlet water pressure	0.2~0.8Mpa	安装间距: Install spacing	43.5mm
流量范围: Flow range	550~800ML(可调) 550~800ML(Adjustable)		



FCD.3-718F

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V	进水口: Inlet	Ø6.3
水压范围: Working pressure	0.05~0.8Mpa	出水口: outlet	Ø6.3
介质温度: Medium temperature	0~50°C	出水压力: Outlet water pressure	0.1±0.02Mpa
进水压力: Inlet water pressure	0.2~0.8Mpa	安装间距: Install spacing	42.5mm
流量范围: Flow range	550~800ML(可调) 550~800ML(Adjustable)		



FCD.3-138B

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
水压范围: Working pressure	0.02~0.8Mpa	出水口: outlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C			
水压(Water Pressure)				
水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-138G

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V	进水口: Inlet	1/2"外螺纹 G1/2" male thread	
水压范围: Working pressure	0.02~0.8Mpa	出水口: outlet	1/2"外螺纹 G1/2" male thread	
介质温度: Medium temperature	0~50°C			
水压(Water Pressure)				
水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



康乐达
KANGLEDA

智能卫浴电磁阀系列 SMART SANITARY SOLENOID VALVE SERIES



FCD.3-138D

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/2"外螺纹
Working pressure Inlet G1/2" male thread

介质温度: 0~50°C 出水口: 1/2"外螺纹
Medium temperature outlet G1/2" male thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-138DB

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/2"内螺纹
Working pressure Inlet G1/2" female thread

介质温度: 0~50°C 出水口: 1/2"内螺纹
Medium temperature outlet G1/2" female thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-138DBAF

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/2"内螺活扣
Working pressure Inlet G1/2" female thread

介质温度: 0~50°C 出水口: 1/2"外螺纹
Medium temperature outlet G1/2" male thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-138DF

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/2"外螺纹
Working pressure Inlet G1/2" male thread

介质温度: 0~50°C 出水口: 1/2"外螺纹
Medium temperature outlet G1/2" male thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min

洗涤电磁阀系列

WASHING SOLENOID VALVE SERIES



FCD.3-1

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 3/4"外螺纹
Working pressure Inlet G3/4" male thread

介质温度: 0~50°C 出水口: Ø12
Medium temperature outlet

安装间距: 45mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-2

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 3/4"外螺纹
Working pressure Inlet G3/4" male thread

介质温度: 0~50°C 出水口: Ø12
Medium temperature outlet

安装间距: 45mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-4

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 3/4"外螺纹
Working pressure Inlet G3/4" male thread

介质温度: 0~50°C 出水口: Ø12
Medium temperature outlet

安装间距: 45mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-5

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 3/4"外螺纹
Working pressure Inlet G3/4" male thread

介质温度: 0~50°C 出水口: Ø12
Medium temperature outlet

安装间距: 45mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min

洗涤电磁阀系列 WASHING SOLENOID VALVE SERIES



FCD.3-6

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V			
水压范围: Working pressure	0.02~0.8Mpa (有压) 0~0.05Mpa(无压)	进水口: Inlet	3/4"外螺纹 G3/4" male thread	
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø10	
安装间距: Install spacing	45mm			
水压(Water Pressure)		0.02Mpa	0.1Mpa	
流量(Flow)		≥3L/min	≥8L/min	
		0.3Mpa	0.8Mpa	
		≥13L/min	≥25L/min	



FCD.3-7

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V		
水压范围: Working pressure	0.02~0.8Mpa	进水口: Inlet	Ø6.3
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø10
水压(Water Pressure)		0.02Mpa	0.1Mpa
流量(Flow)		≥3L/min	≥8L/min
		0.3Mpa	0.8Mpa
		≥13L/min	≥25L/min



FCD.3-198

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V		
水压范围: Working pressure	0.02~0.8Mpa (有压) 0~0.05Mpa(无压)	进水口: Inlet	3/4"外螺纹 G3/4" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø12
安装间距: Install spacing		45mm	
水压(Water Pressure)		0.02Mpa	0.1Mpa
流量(Flow)		≥3L/min	≥8L/min
		0.3Mpa	0.8Mpa
		≥13L/min	≥25L/min



FCD.3-198K

额定电压: Rated voltage	DC9V/DC12V/DC24V/DC36V/DC48V/DC110V		
水压范围: Working pressure	0.02~0.8Mpa (有压) 0~0.05Mpa(无压)	进水口: Inlet	3/4"外螺纹 G3/4" male thread
介质温度: Medium temperature	0~50°C	出水口: outlet	1/4"外螺纹 G1/4" male thread
水压(Water Pressure)		0.02Mpa	0.1Mpa
流量(Flow)		≥3L/min	≥8L/min
		0.3Mpa	0.8Mpa
		≥13L/min	≥25L/min

净水器电磁阀系列
R.O.SOLENOID VALVE SERIES



FCD.3-168B

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 1/2"无螺纹
Working pressure 0~0.05Mpa(无压) Inlet G1/2" No thread

介质温度: 0~50°C 出水口: 1/2"无螺纹
Medium temperature outlet G1/2" No thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-178

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 1/2"外螺纹
Working pressure 0~0.05Mpa(无压) Inlet G1/2" male thread

介质温度: 0~50°C 出水口: 1/2"外螺纹
Medium temperature outlet G1/2" male thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-438

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: Ø9
Working pressure 0~0.05Mpa(无压) Inlet

介质温度: 0~50°C 出水口: Ø9
Medium temperature outlet

安装间距: 40.5mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-438B

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: Ø9
Working pressure 0~0.05Mpa(无压) Inlet

介质温度: 0~50°C 出水口: Ø9
Medium temperature outlet

安装间距: 43mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



康乐达
KANGLEDA

净水器电磁阀系列 R.O.SOLENOID VALVE SERIES



FCD.3-438C

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: Ø9
Working pressure 0~0.05Mpa(无压) Inlet

介质温度: 0~50°C 出水口: Ø9
Medium temperature outlet

安装间距: 43mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-478

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 3/8"分内螺纹
Working pressure 0~0.05Mpa(无压) Inlet G3/8" female thread

介质温度: 0~50°C 出水口: 1/8"分内螺纹
Medium temperature outlet G1/8" female thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-478A

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 3/8"外螺纹
Working pressure 0~0.05Mpa(无压) Inlet G3/8" male thread

介质温度: 0~50°C 出水口: 3/8"外螺纹
Medium temperature outlet G3/8" male thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-528

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 3/4"外螺纹
Working pressure 0~0.05Mpa(无压) Inlet G3/4" male thread

介质温度: 0~50°C 出水口: 1/2"外螺纹
Medium temperature outlet G1/2" male thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-558

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 快插
Working pressure 0~0.05Mpa(无压) Inlet quick connect

介质温度: 0~50°C 出水口: 快插
Medium temperature outlet quick connect

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-558H

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 快插
Working pressure 0~0.05Mpa(无压) Inlet quick connect

介质温度: 0~50°C 出水口: 快插
Medium temperature outlet quick connect

安装间距: 44mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-608

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 1/2"内螺活扣
Working pressure 0~0.05Mpa(无压) Inlet G1/2" female thread

介质温度: 0~50°C 出水口: 1/2"外螺纹 & 1/4快插接头
Medium temperature outlet G1/2" male thread
G1/4" quick connect

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-668

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 1/4"内螺纹
Working pressure 0~0.05Mpa(无压) Inlet G1/4" female thread

介质温度: 0~50°C 出水口: 1/4"内螺纹
Medium temperature outlet G1/4" female thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



康乐达
KANGLEDA

净水器电磁阀系列 R.O.SOLENOID VALVE SERIES



FCD.3-668A

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/4"内螺纹
Working pressure Inlet G1/4" female thread

介质温度: 0~50°C 出水口: 1/4"内螺纹
Medium temperature outlet G1/4" female thread

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min
废水流量(Waste Flow)	/	/	≥300cc/min	/



FCD.3-668AS

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/4"内螺纹
Working pressure Inlet G1/4" female thread

介质温度: 0~50°C 出水口: 1/4"内螺纹
Medium temperature outlet G1/4" female thread

延时特性: 通电18S后自动断电,再次上电应能重复延时功能
Time Delay Characteristic With pc board,cut off after 18s power on automatically

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min
废水流量(Waste Flow)	/	/	≥300cc/min	/



FCD.3-678A

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: 1/4"快插接头
Working pressure 0~0.05Mpa(无压) Inlet G1/4" quick connect

介质温度: 0~50°C 出水口: 1/4"快插接头
Medium temperature outlet G1/4" quick connect

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-678B

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/4"快插接头
Working pressure Inlet G1/4" quick connect

介质温度: 0~50°C 出水口: 1/4"快插接头
Medium temperature outlet G1/4" quick connect

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量(Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min
废水流量(Waste Flow)	/	/	≥300cc/min	/



FCD.3-678BS

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa 进水口: 1/4"内螺纹
Working pressure Inlet G1/4" female thread

介质温度: 0~50°C 出水口: 1/4"内螺纹
Medium temperature outlet G1/4" female thread

延时特性: 通电18S后自动断电,再次上电应能重复延时功能

Time Delay Characteristic With pc board,cut off after 18s power on automatically

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min
废水流量 (Waste Flow)	/	/	≥300cc/min	/



FCD.3-678G

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: Ø6.3
Working pressure 0~0.05Mpa(无压) Inlet

介质温度: 0~50°C 出水口: Ø6.3
Medium temperature outlet

安装间距: 42.5mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min
废水流量 (Waste Flow)	/	/	≥300cc/min	/



FCD.3-678H

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: Ø6.3
Working pressure 0~0.05Mpa(无压) Inlet

介质温度: 0~50°C 出水口: Ø6.3
Medium temperature outlet

安装间距: 41mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-698A

额定电压: 脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/
Rated voltage AC12V/AC24V/AC36V/AC48V/AC110V/AC220V

水压范围: 0.02~0.8Mpa (有压) 进水口: Ø6.3
Working pressure 0~0.05Mpa(无压) Inlet

介质温度: 0~50°C 出水口: Ø6.3
Medium temperature outlet

安装间距: 33.8mm
Install spacing

水压(Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa	0.8Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min	≥25L/min



FCD.3-698B

额定电压: Rated voltage	脉冲6V/DC9V/DC12V/DC24V/DC36V/DC48V/DC110V/ AC12V/AC24V/AC36V/AC48V/AC110V/AC220V		
水压范围: Working pressure	0.02~0.8Mpa (有压) 0~0.05Mpa(无压)	进水口: Inlet	Ø6.3
介质温度: Medium temperature	0~50°C	出水口: outlet	Ø6.3
安装间距: Install spacing	33.8mm		
水压 (Water Pressure)	0.02Mpa	0.1Mpa	0.3Mpa
流量 (Flow)	≥3L/min	≥8L/min	≥13L/min
废水流量 (Waste Flow)	/	/	≥300cc/min



逆止阀

水压范围: Working pressure	0.1~1Mpa	进水口: Inlet	1/4"快插接头 G1/4" quick connect
介质温度: Medium temperature	0~60°C	出水口: outlet	1/4"快插接头 G1/4" quick connect
功能特性: Functional characteristics	在反向0.1MPa水压下应能正常逆止,且无渗透、滴水现象 Check valve should be able to check normally under the reverse 0.1Mpa water pressure ;and should be no penetration ,dripping phenomenon		



高压开关

额定电压: Rated voltage	DC12V/DC24V/DC36V/DC48V/AC110V/AC220V		
水压范围: Working pressure	0~0.4Mpa	进水口: Inlet	1/4"快插接头 G1/4" quick connect
介质温度: Medium temperature	0~40°C	出水口: outlet	1/4"快插接头 G1/4" quick connect
动作特性: Action water pressure	当水压从0上升到0.25Mpa±0.05Mpa时,开关断开; 当水压下降到0.15Mpa±0.05Mpa时,开关闭合; 两动作值差值 $\Delta P \geq 0.1\text{Mpa}$ When water pressure up from 0 to 0.25Mpa ±0.05Mpa ,switch off ; When water pressure drop to 0.15Mpa± 0.05Mpa ,switch on ; Difference Value between two operations $\Delta p \geq 0.1\text{Mpa}$		



低压开关

额定电压: Rated voltage	DC12V/DC24V/DC36V/DC48V/AC110V/AC220V		
水压范围: Working pressure	0~0.4Mpa	进水口: Inlet	1/4"快插接头 G1/4" quick connect
介质温度: Medium temperature	0~40°C		
动作特性: Action water pressure	当水压≤0.02Mpa时,开关断开; 当水压≥0.01Mpa,开关闭合; When the water pressure is ≤0.02Mpa ,the switch will be turned off ; When the water pressure is ≥ 0.01Mpa ,the switch will be closed;		